

TI073-3W

This is a legacy product document supported by Resideo. It is no longer manufactured.

For Lights

Do-it-yourself installation and both the flexibility of 7-day programming and the convenience of automatic sunset/sunrise activation



MODEL & RATINGS

TI073-3W 500 W max./ 40 W min. 120 V, 60 Hz

4 A (R)

PROGRAMMABLE

SPECIFICATIONS

PROGRAMMING

7-day programming, up to 42 events
Solar timetable can be used simultaneously with daily programs*

OPERATING MODES

Manual (conventional on/off switch)
Automatic
Random


CONNECTION

Single pole (2 wire) or multiswitch (3-way)

DIMENSIONS (H•W•D)

68 x 43 x 43 mm / 2.7 x 1.7 x 1.7 inches

INSTALLATION

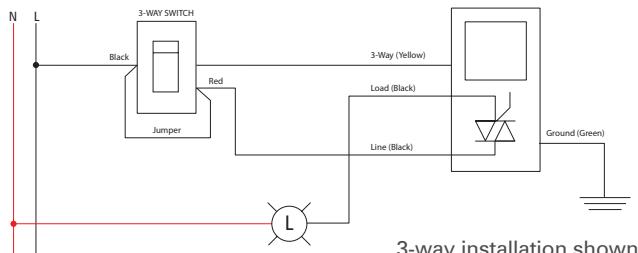

3 year
warranty

FEATURES

Sleek design mounts flush with wallplate

Works with incandescent, halogen and fluorescent lighting (compatible with electronic ballasts)

Large white backlit display with a night light mode option for easy reading in dark areas

Confirmation LED for at-a-glance load status (on or off)

Random mode activates lights randomly to simulate a presence when away from home

Easy intuitive 3-button interface – no door to open

Automatic daylight savings – no need to reprogram

Hidden lock feature prevents tampering without requiring costly security cover

PROGRAMMING

Up to 21 programs (21 on/off times) per week. A program can apply to a single day or repeat every day. Sunset/sunrise times are calculated automatically every day. *For each day of the week, the user can choose: sunset/sunrise programming or their own on/off time, or one of each (e.g. sunset and midnight).

Tl073-3W

PRODUCT



SPECIFICATIONS

WEIGHT

Clamshell	0.282 kg
Inner box	1.472 kg
Master box	6.956 kg

DIMENSIONS

	H	W	D
Clamshell	8.75 in.	6.25 in.	2.25 in.
Inner box	9.8 in.	8.7 in.	14.6 in.
Master box	21 in.	15.2 in.	18.3 in.

INNER / MASTER QUANTITY

Inner box	5 units
Master box	20 units

