



DR65

NOTE: The DR65A2000 model is obsolete.

Ventilating Dehumidification System

SPECIFICATION DATA

DR65 Capacities and Performance

Part Number:	DR65A2000
Blower:	160 CFM @ 0.0 in. WG 100 CFM @ 0.6 in. WG
Supply Voltage:	120 VAC; 60 Hz.
Amps:	5.2 A
Power transformer to R/C terminals:	24 VAC, 0.85A
Energy performance:	2.22 liters (4.7 pints) per kilowatt hour (KWH) Energy
Refrigerant:	R-410A
Operating Temp Range (outside cabinet):	34 – 135 °F (1.1 – 57.2 °C)
Capacity:	21 pints/day (60 °F [15.6 °C], 60 %RH) 42 pints/day (70 °F [21.1 °C], 60 %RH) 65 pints/day (80 °F [26.7 °C], 60 %RH)
Coverage:	Up to 1800 sq. ft.
Duct Connections:	8 in. Round Inlet 8 in. Round Outlet (ABS Plastic)
Filter Efficiency:	Standard MERV-11
Drain Connection:	3/4 in. threaded female NPT, with attached 3/4 in. threaded male NPT
Dimensions (See Fig. 1):	
Width:	12 in.
Height:	12 in.
Length:	28-1/2 in. (with collars)
Weight:	55 lbs (25 Kg)
Shipping Specs	
Width:	15-1/2 in.
Height:	17-1/4 in.
Length:	31-1/2 in.
Weight:	65 lbs (30 Kg)
Optional Parts	
Replacement Filter	50049537-005
Motorized Ventilation Damper	EARD6
Bypass Damper	CPRD8/U
Compressor Relay, 24 VAC, 30 A	50049537-002
Compressor Run Capacitor	50049537-003
8" Duct Collar	50049537-004
Fan Assembly	50049537-006
Capacitor - Fan	50070204-001
Fan Relay, SPDT, 24 VAC, 15A	50035445-011
Transformer 120/24 VAC, 40 VA	50035445-013
Defrost Thermostat	50070204-002

ETL Listed. Energy Star Rated. Conforms to UL standard 60335-2-40.

For more information call 1-800-468-1502 or visit our website at customer.resideo.com.

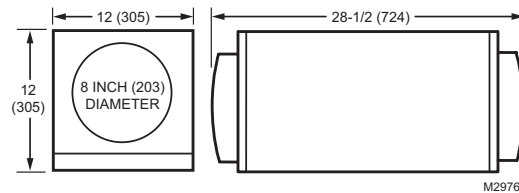


Fig. 1. Dimensions in in. (mm).

DR65 Whole-House Dehumidifiers are designed to help maintain proper humidity levels in the home. Lower humidity levels feel more comfortable, and helps safeguard against problems from excess moisture in the home such as mold, mildew, warped wood, peeling of paint, or musty odors. DR65 Whole Home Dehumidification Systems are Energy Star rated, providing efficient and economical operation.

Dehumidification

The DR65 dehumidifier utilizes refrigeration and internal air circulation to cool the incoming air stream below its dew point. Water condenses and drains off the coil, sending drier air back into the house.

- Can remove up to 65 pints/day of moisture.
- Energy Star rated
- Electrocoating reduces coil corrosion and helps prevent refrigerant leaks
- Top or side ducted exhaust
- Reduced noise during operation
- MERV 11 air filtration

Ventilation

The DR65 has a separate control for ventilation, so the powerful onboard blower can be used to efficiently bring fresh air into the house even when dehumidification is not needed.

Simplified Wiring

The DR65 has an onboard dehumidistat that allows the unit to run without any additional wiring. In addition, DR65 dehumidifiers can be controlled by a variety of 24-volt remote wired and wireless controls.


The DR65 allows the use of a 24V normally closed float switch or water sensor to simplify installation in a drain pan. This will allow the external float switch to kill power to the compressor in the event of water blockage.



68-3086-03

A

Dedicated Return to Main Supply

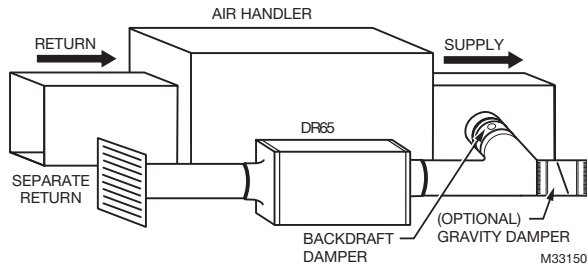


Ideal when...

- Access to a dedicated central return for DR65 is available.
- Combined with A/C operation; requires backdraft damper on the exhaust port to minimize backdraft when DR65 is not on but A/C is.
- Providing dry air to a specific area with an optional 20% open gravity damper on DR65 supply.

B

Main Return to Main Supply

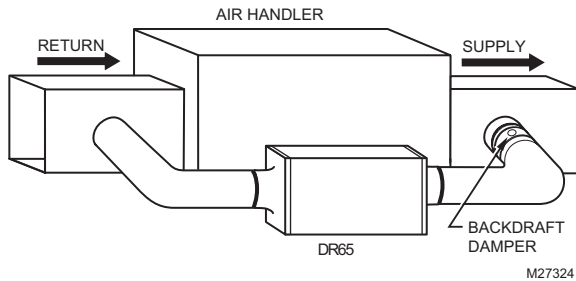


Ideal when...

- Running DR65 when not running A/C. Requires damper on the exhaust port to minimize backdraft when DR65 is not on but A/C is.
- Access to a dedicated central return for DR65 is not available.
- System fan should run with dehumidifier for best results.

C

Main Return to Main Return

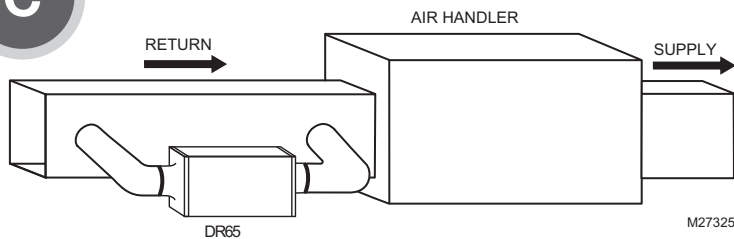


Ideal when...

- Running DR65 with A/C operation.
- System fan must run with dehumidifier.
- Minimizing discharge air temperature (DAT) increase is preferred.
- Access to a dedicated central return for DR65 is not available.

D

Dedicated Return to Dedicated Supply

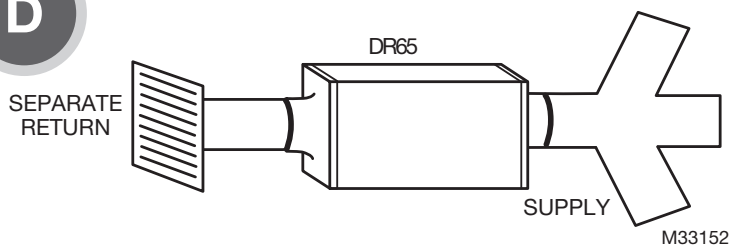

Ideal when...

- DR65 will not be ducted to a forced air HVAC system.



1. Never operate a unit with a damaged power cord. If the power cord is damaged it must be replaced by the manufacturer, its service agent, or similarly qualified person in order to avoid a hazard.
2. The appliance is not intended for use by persons (including children) with reduced physical, sensory, or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety. Children should be supervised to ensure that they do not play with the appliance.